



## Finish Options Putting Aesthetics Over Technology

The StingRay line of outdoor speakers are offered in a variety of styles. Stock finishes include matte black or matte white - or in the case of the new Element Series - sleek brushed aluminum.

The StingRay family can also be special ordered in sand, jade, or gray stone textured finishes or custom painted to match any décor.

To offer a completely unique finish option, select the Image Wrap version and elect to have an actual photograph of the speaker's surroundings or even artwork laminated directly to the face of the speaker.



## StingRay Element Series™ Outdoor Performance Elevated



The new StingRay Element Series features performance boosting brushed aluminum in place of the standard Fidelity Glass™ radiating surface. Still impervious to the elements but with increased sensitivity and a sleek modern style, the Element Series is designed for the most discriminating listeners. The Element Series will set the mark by which outdoor speakers are judged.

# StingRay

Environmentally Durable Sound



A Division of Dimensional Communications, Inc.  
1220 Anderson Road | Mount Vernon, WA 98274  
Toll Free: 888.865.6800 | Fax: 360.424.8872 | [StealthAcoustics.com](http://StealthAcoustics.com)

# StingRay™

## Accepting Mother Nature's Challenge

Creating a truly environmental speaker that can take on nature's toughest elements is no easy task. The StingRay family of outdoor speakers are completely sealed with no exposed grills or drivers to corrode or break down. The StingRay line is at home in nearly any outdoor environment where ultimate durability and performance are desired.






## STINGRAY 6G FULL RANGE, 6" 2-WAY SPEAKER



The new StingRay 6G combines a 6.5" woofer with a 30 mm tweeter set in a rugged and compact enclosure. Constructed of ABS plastic and infused with fiberglass for high performance and longevity, the StingRay 6G works well in applications where space is limited or an unobtrusive speaker is required.

Frequency Response	50Hz to 18kHz
Power Capacity	120 watts RMS
Min. Recommended Power	60 watts
Protection	Two independent, self-resetting devices (low and high frequency)
Sensitivity (1 meter @ 1 watt)	83 dB
High Frequency Driver	One 1" neodymium motor
Low Frequency Driver	One 1" voice coil, one 6.5" woofer
Magnet	One ceramic 20 oz.
System Impedance	8Ω nominal
Polar Dispersion	170 degrees horizontal & vertical
Width	14-7/8" (378 mm)
Height	10-7/8" (276 mm)
Depth	3-13/16" (97 mm)
Weight	12 lbs. (6 kg) each
Temperature Range	0°F (-17°C) to 150°F (60°C)
Finish Options	Element Series aluminum/black, white or black. Optional textured stone finish or vinyl Image Wrap available.

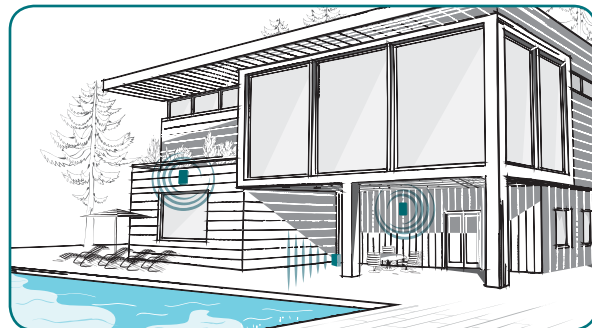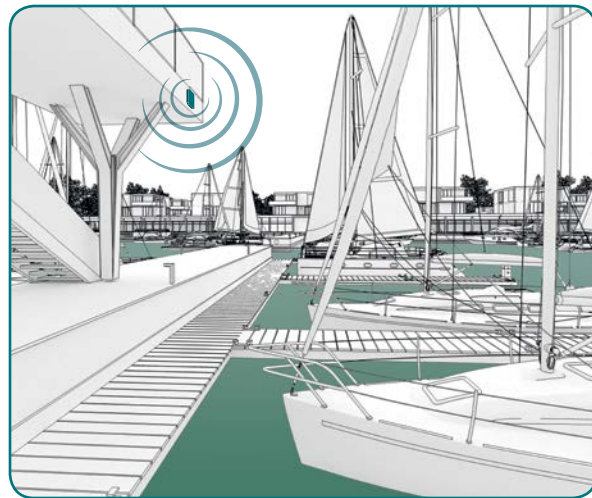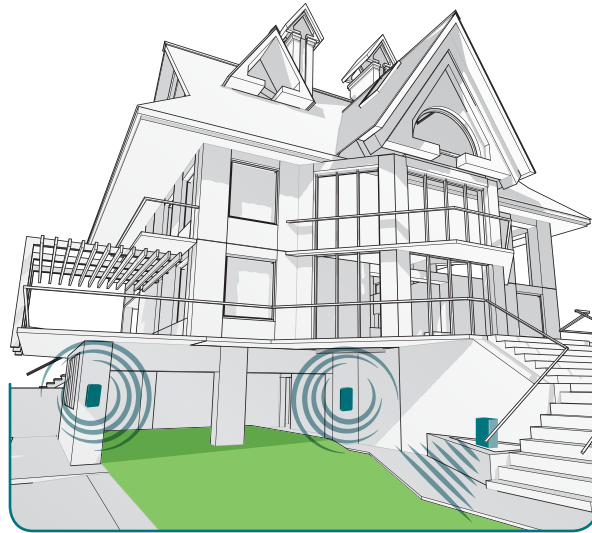

## STINGRAY 8G FULL RANGE, 8" 2-WAY SPEAKER



The StingRay 8G is the flagship of Stealth Acoustics' outdoor line and offers impressive fidelity and bass response from a hermetically sealed all-weather speaker. The 8G is perfect for outdoor theaters, foreground music or anywhere robust, full-range sound is desired.

Frequency Response	45Hz to 18kHz
Power Capacity	160 watts RMS
Min. Recommended Power	80 watts
Protection	Two independent, self-resetting devices (low and high frequency)
Sensitivity (1 meter @ 1 watt)	83 dB
High Frequency Driver	One 1" neodymium motor
Low Frequency Driver	One 1" voice coil, one 8" woofer
Magnet	One ceramic 20 oz.
System Impedance	8Ω nominal
Polar Dispersion	170 degrees horizontal & vertical
Width	20-7/8" (530 mm)
Height	14-3/4" (374 mm)
Depth	3-7/8" (98 mm)
Weight	15 lbs. (7 kg) each
Temperature Range	0°F (-17°C) to 150°F (60°C)
Finish Options	Element Series aluminum/black, white or black. Optional textured stone finish or vinyl Image Wrap available.



## STINGRAY 430G ELEMENT SERIES SUBWOOFER



The perfect addition to either of the full range StingRay speakers, the 430G passive subwoofer features eight 8" woofer drivers and provides deep bass response for any outdoor environment. Watertight and finished in the attractive Element Series brushed aluminum, the 430G will compliment any high performance outdoor system.

Frequency Response	20Hz to 160Hz
Power Capacity	400 watts RMS
Min. Recommended Power	100 watts
Sensitivity (1 meter @ 1 watt)	86 dB
Low Frequency Drivers	Eight 1" voice coils, eight 8" woofers
Magnets	Eight ceramic 20 oz.
Crossover Frequency	50Hz with 18dB slope recommended
System Impedance	8Ω nominal
Polar Dispersion	170 degrees horizontal & vertical
Width	17-1/4" (438 mm)
Height	31" (787 mm)
Depth	17-1/4" (438 mm)
Weight	72 lbs. (33 kg) each
Temperature Range	0°F (-17°C) to 150°F (60°C)
Finish Options	Element Series aluminum/black.

## IP68 CERTIFIED

The StingRay 6G and 8G outdoor speakers feature the highest level of ingress protection available - having proven themselves under water at 1 meter for over 60 hours.



Totally protected against ingress of solids



Protected against long periods of immersion